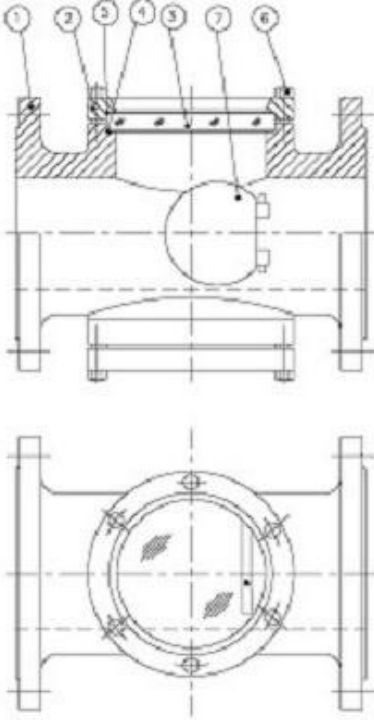


| GENERAL | | GENERAL ASSEMBLY DRAWING |
|---------------------------------------|------------------------------------|---|
| PRODUCT NAME | SIGHT FLOW INDICATOR |  |
| MODEL NO | SFDFF-Z/Z-40/40-CSC/S4 | |
| PRODUCT MODEL TYPE | FLANGED-DOUBLE WINDOW-FLAPPER TYPE | |
| QUANTITY | 2.00 | |
| TAG NOS | | |
| HSN NO. | 90261090 | |
| CERTIFICATION | NA | |
| VALVE DETAILS | | |
| INLET CONNECTION TYPE | FLANGED AS PER ANSI B16.5 RF 150# | |
| OUTLET CONNECTION TYPE | FLANGED AS PER ANSI B16.5 RF 150# | |
| VALVE OUTLET SIZE | 40NB | |
| VALVE INLET SIZE | 40NB | |
| MATERIAL OF CONSTRUCTION | | |
| BODY | A216 Gr.WCB | |
| COVER PLATE | CARBON STEEL | |
| GLASS | TOUGHENED | |
| GASKET | PTFE | |
| CUSHION | PTFE | |
| FASTENERS | CARBON STEEL | |
| FLAPPER | STAINLESS STEEL 304 | |
| FLAPPER PIN | STAINLESS STEEL 304 | |
| FLAPPER SPRING | STAINLESS STEEL 304 | |
| PROCESS PARAMETER | | |
| NORMAL OP FLOW RATE | NA | |
| MAX OP FLOW RATE | NA | |
| SERVICE APPLICATION | | |
| FLUID / GAS | | |
| MOLECULAR WEIGHT | | |
| FLASH POINT | | |
| DESIGN TEMPERATURE | | |
| OPERATING TEMPERATURE | | |
| DESIGN PRESSURE | HYDRO TEST PRESSURE – 15 kg/cm2(g) | |
| OPERATING PRESSURE | | |
| APPLICATION AT PROJECT SITE | | |
| INSPECTION BY | TPI | |
| ADDITIONAL SPECIFICATION/REQUIREMENTS | | |
| TESTING REQUIREMENTS | | |